


OIL SANDS STEAM ASSISTED GRAVITY DRAINAGE (SAGD) PROCESS FLOW

OPTIONS

Ecodyne Products ★

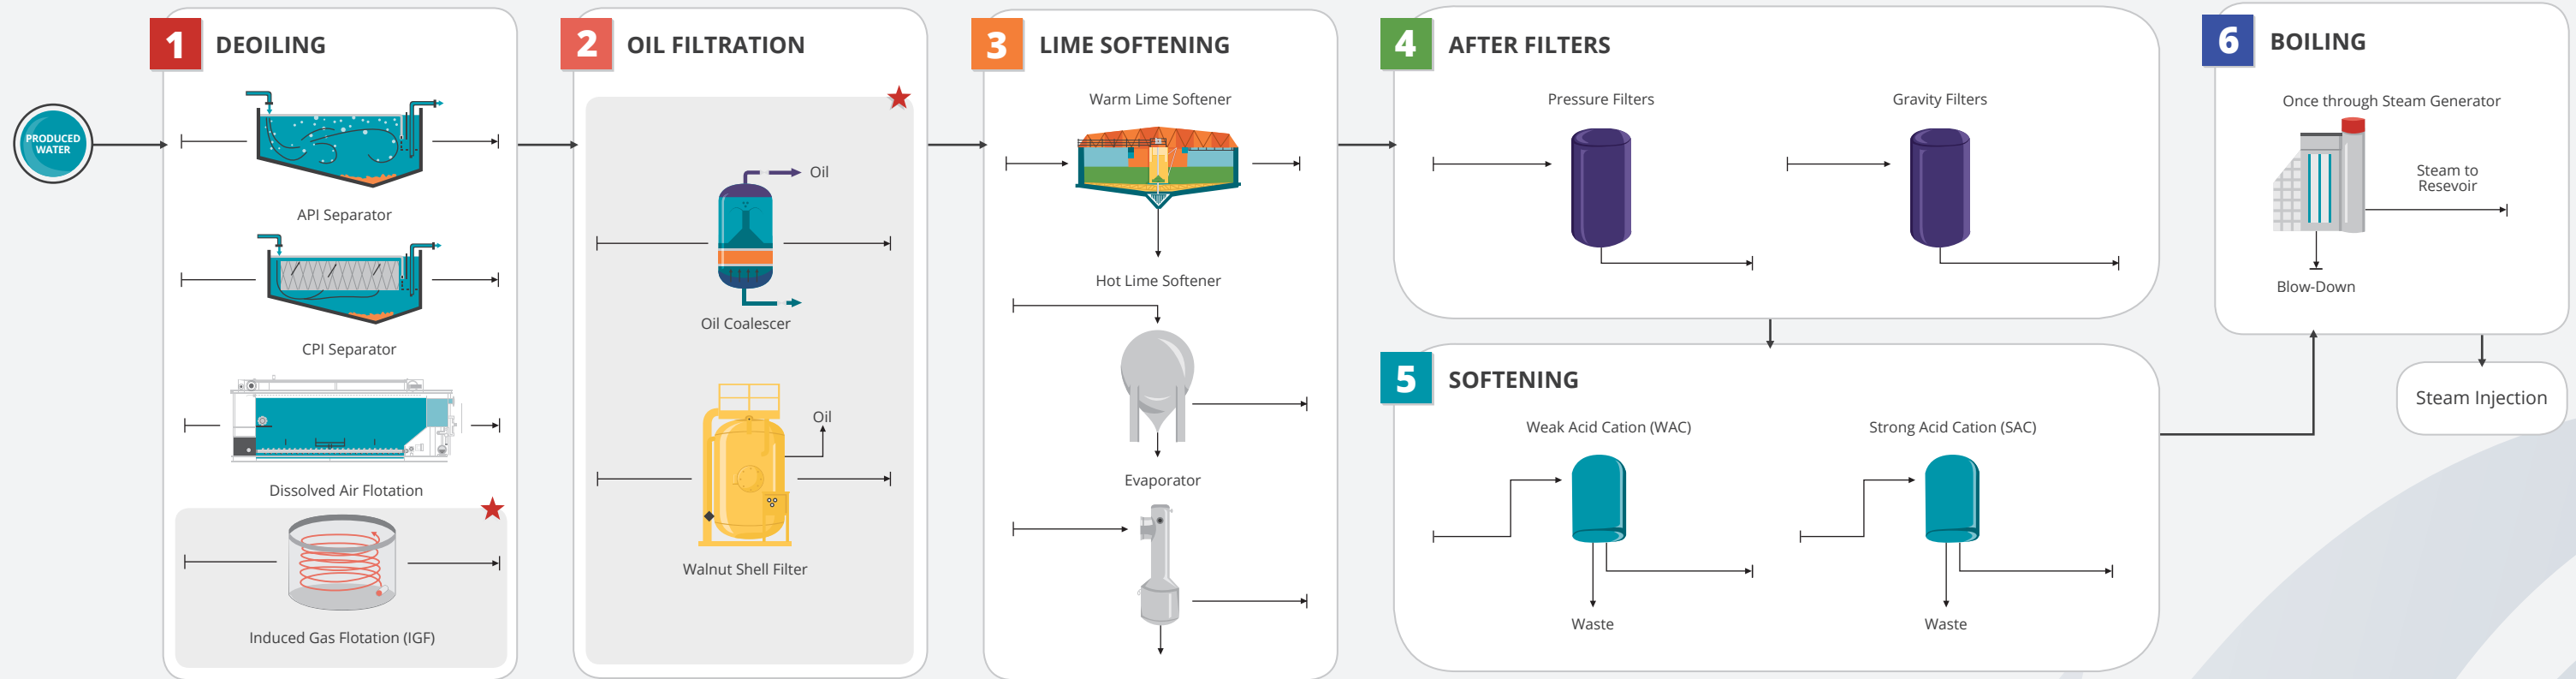

Your Local Sales Representative is:

1 | DEOILING

Primary step to recover the majority of oil in produced water.

2 | OIL FILTRATION

Final treatment to remove low levels of recoverable oil in plant wastewater.

- Trisep® and ELF® Oil Coalescers
- Hydroflow® Walnut Shell Filters

ECODYNE
Water

ECODYNE.COM